




## STF-37 TFT 37" DISPLAY

- ▶ **TFT active matrix**
- ▶ **high visibility of presented information**
- ▶ **high contrast**
- ▶ **wide viewing angle - Super MVA technology**
- ▶ **long lifetime**
- ▶ **robust, industrial enclosure**
- ▶ **light weight**
- ▶ **anti-reflective coating**
- ▶ **integrated PC unit (STF-37PC version)**
- ▶ **remote administration**
- ▶ **possibility of assembling monitor walls**

## EXTERNAL DIMENSIONS

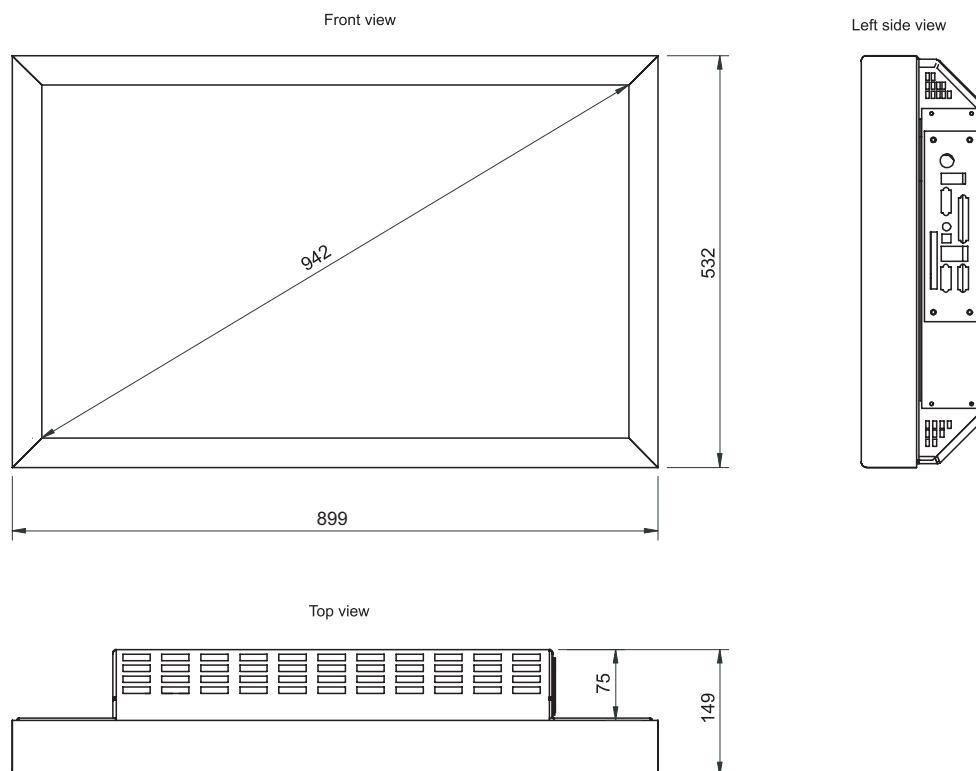

## TECHNICAL SPECIFICATION

DESCRIPTION	TECHNICAL DATA
Resolution	1920 x 1080
Contrast	1000:1
Brightness	600 cd/m <sup>2</sup>
Viewing angle	176
Panel type	a-si TFT active matrix
Pixel pitch	0,4275mm x 0,4275mm
Display colors	16,7 mln
Response time	12 ms
Power supply	185-260 V AC, 50-60 Hz
Power consumption	168 W (with PC unit 228W )
Communication interface	ethernet 10/100 Mbit/s, TCP/IP (with PC unit)
Weight	32kg
Dimension W x H x L	899mm x 532 mm x 149mm
Active area W x H	820.8mm x 461.7mm
Life time	min. 50 000 h
Inputs	s-video, dvi, vga
Housing colors	black or according to customer's request
Mounting methods	wall bracket, ceiling arm, stand
Optional accessories	integrated PC unit, TV tuner, safety glass
Configuration of optional PC unit	Pentium-M CPU, flash disc or hard disc, 512 RAM, hardware watch-dog, LINUX or Windows, remote administration, optional WAN