




STF-40 TFT 40" DISPLAY

- ▶ TFT active matrix
- ▶ high visibility of presented information
- ▶ long lifetime
- ▶ robust, industrial enclosure
- ▶ light weight
- ▶ anti-reflective coating
- ▶ integrated PC unit (STF-40PC version)
- ▶ remote administration
- ▶ possibility of assembling monitor walls

EXTERNAL DIMENSIONS

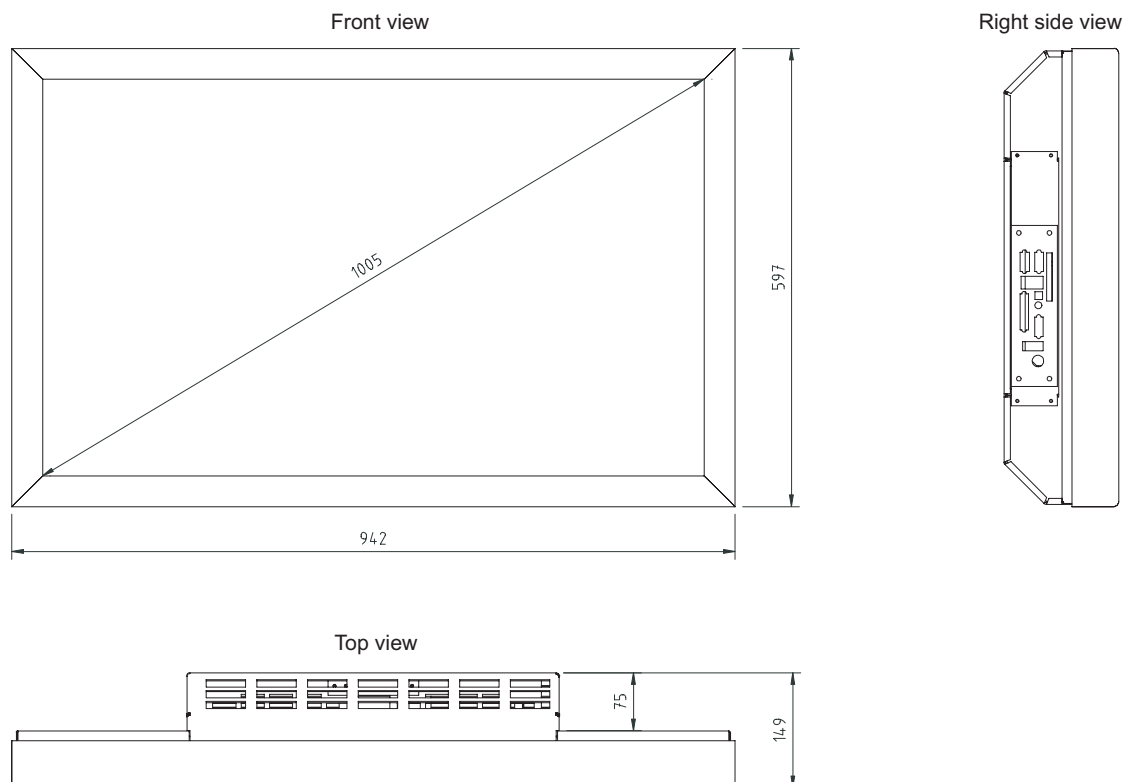

TECHNICAL SPECIFICATION

DESCRIPTION	TECHNICAL DATA
Resolution	1280 x 768
Contrast	600:1
Brightness	500 cd/m ²
Viewing angle	170
Panel type	a-si TFT active matrix
Pixel pitch	0,6735mm x 0,6735mm
Display colors	16,7 mln
Response time	22 ms
Power supply	185-260 V AC, 50-60 Hz
Power consumption	200W (with PC unit 260W)
Communication interface	ethernet 10/100 Mbit/s, TCP/IP (with PC unit)
Weight	46kg
Dimension W x H x L	942mm x 597mm x 149mm
Active area W x H	862.080mm x 517.248mm
Life time	min. 50 000 h
Inputs	s-video, dvi, vga
Housing colors	black or according to customer's request
Mounting methods	wall bracket, ceiling arm, stand
Optional accessories	integrated PC unit, TV tuner, safety glass
Configuration of optional PC unit	Pentium-M CPU, flash disc or hard disc, 512 RAM, hardware watch-dog, LINUX or Windows, remote administration, optional WAN